


Chain Transfer Conveyor System

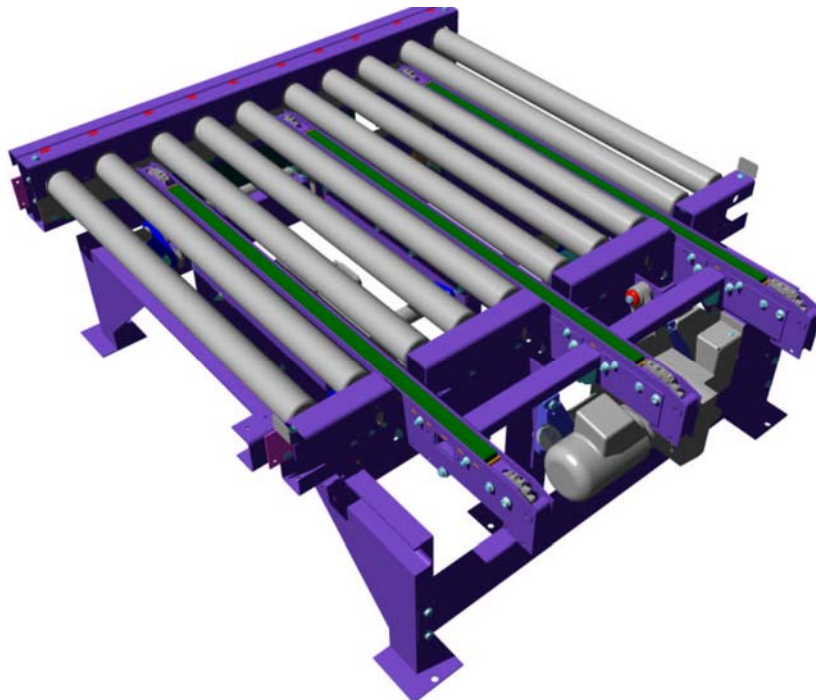

Transfer modules combine the features and benefits of the roller systems and chain conveyor in one module. With a nominal roller pitch of 150mm for all pallets these transfers offer exceptional support for pallets during the transfer operation.

- **150mm roller pitch**
- **3mm thick steel rollers with steel sprockets**
- **¾" pitch flat sided chain conveyor**
- **Single handed operation**
- **Transfer to transfer 1600mm long. Extended transfer to transfer 2520mm long.**

Heights

Range of heights available from 400 - 900mm (Top of Roller)

Motor

Chain Conveyor 0.75 and 1.1kW, Transfer 0.55kW,
Roller Conveyor 0.37 and 0.55kW

Motor Types

No Brake - No Inverter
No Brake - Soft Start
No Brake - Inverter
No Brake - Soft Start Reversing
Braked - No Inverter
Braked - Soft Start
Braked - Inverter
Braked - Soft Start Reversing

Chain

3/4" pitch simplex chain

Pallets

800mm L-R and 1000mm L-R

Speeds

Roller Conveyor - 12m/min and 18m/min
Chain Transfer - 12m/min and 18m/min
Up to 205 pallet transfers per hour

Electrical Power

Motors should be connected to 400/415V 3-phase,
50Hz supply.

Motor Power (kW)	Full Load Current (A)
0.37	0.95
0.55	1.4
0.75	1.9

